

Information Data Sheet

Detector Tube **H₂S-0.4%**

Part No. (US): **655932**

Part No. **D5086857**

1. Application

Detection of hydrogen sulphide (H₂S) in air or in technical gases.

2. Detector Tube Sampling Pump

KWIK DRAW (formerly MSA AUER) Gas-Tester® I/H, Gas-Tester® I / ThumbPump™-Sampler, Toximeter® II, Kwik-Draw™-Pump or other suitable detector tubes pumps. Observe respective instructions for use.


3. Measuring Range

(0.1... 4) Vol% hydrogen sulphide at 1 pump stroke (n=1)

4. Chemical Reaction and Color Change

Reaction of hydrogen sulphide with copper compound forming copper sulphide.

Color change: Light blue → Grey/black

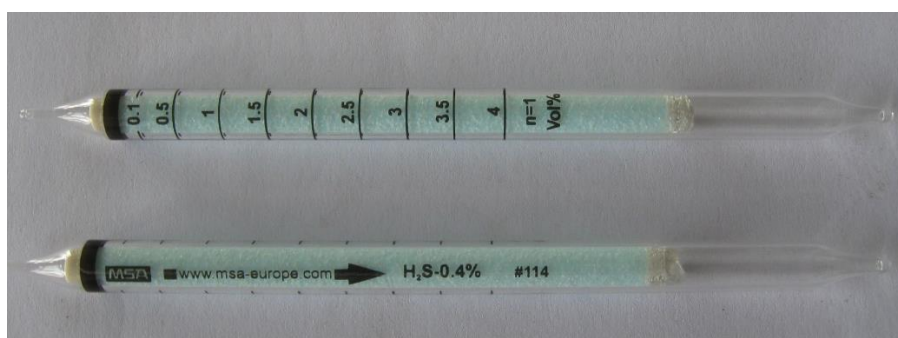

5. Ambient Conditions During Sampling

Detector tubes can be used without compensation of the reading between 0 °C and 50 °C (32 °F and 120 °F) and Up to 90 % RH [75 g/m³ at 50 °C (120 °F)] water vapor will not affect accuracy of indication.

6. Interferences and Cross Sensitivities

- a) No interference from:
 - hydrogen, methane, ethane, propane, butanes, carbon monoxide, carbon dioxide.
 - higher saturated hydrocarbons, olifinic hydrocarbons, aromatic hydrocarbons up to 10 vol.%
 - sulfur dioxide, carbon dioxide up to 1000 ppm.
- b) Comparable concentrations of mercaptans will interfere with the reading.

Manufactured By:

Uniphos Envirotronic Pvt. Ltd (100% EOU)

P.O. Nahuli - 396 108

Tal. Umbergaon,

Dist: Valsad, Gujarat, India

Tel. : +91 9909994042

gasdetection@uniphos-envirotronic.com

Marketing Office:

Uniphos Envirotronic Pvt. Ltd

Readymoney Terrace, 167,

Dr. Annie Besant Road, Worli,

Mumbai 400 018, India.

Tel. : +91(22) 6123 3500

Fax : +91(22) 2493 8826/+91 (22) 2497 8119

www.kwikdrawtubes.com

Rev.02/Jan17