

Information Data Sheet



Detector Tube Ethanol-100

Part No. (US): 804136

Part No. D5086818

1. Application

Detection of ethanol (ethyl alcohol, C₂H₅OH).

2. Detector Tube Sampling Pump

UNIPHOS KWIK DRAW (formerly MSA AUER) GasTester[®] IIH, GasTester[®] I / ThumbPump[™] Sampler, Toximeter[®] II, Uniphos KwikDraw[™] Pump or other suitable detector tubes pumps. Observe respective instructions for use.


3. Measuring Range

100 ppm ... 3,000 ppm ethanol at n=10 (10 pump strokes).

4. Chemical Reaction and Color Change

Oxidation of ethanol by a chromate/sulfuric acid reagent

Color change: red → greyishgreen

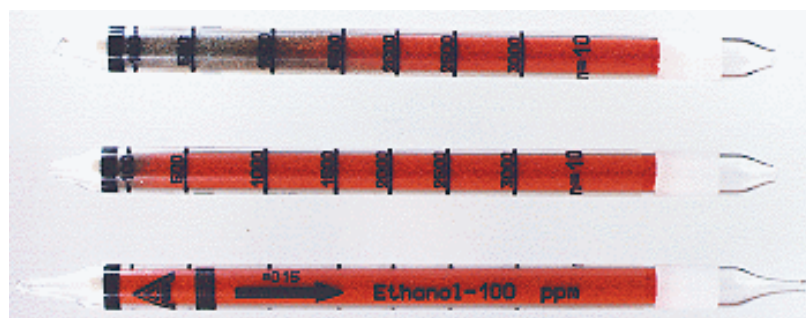

5. Ambient Conditions During Sampling

Detector tubes can be used without compensation of the reading between 0 °C and 30 °C (32 °F and 86 °F) and between 10% rh [0.5 g/m³ at 0 °C (32 °F)] and 90% rh [27 g/m³ at 30 °C (86 °F)].

6. Interferences and Cross Sensitivities

- a) No interference from:
- hydrogen, hydrocarbons (methane, ethane, ethylene), carbon monoxide, carbon dioxide.
 - halogenated hydrocarbons (e.g. trichloroethane, trichloroethylene, chlorobenzene), hydrogen sulfide, carbon disulfide, acetic acid up to 5,000 ppm.
 - aldehydes, ketones, ethers, esters up to 1,000 ppm.

Manufactured By:
Uniphos Envirotronic Pvt. Ltd
P.O. Nahuli 396 108
Tal. Umbergaon,
Dist: Valsad, Gujarat, India
Tel. : +91(260) 2730156 / 57 / 58
Fax : +91(260) 2730160

gasdetection@uniphos.com

Marketing Office:
Uniphos Envirotronic Pvt. Ltd
Readymoney Terrace, 167,
Dr. Annie Besant Road, Worli,
Mumbai 400 018, India.
Tel. : +91(22) 6123 3500
Fax : +91(22) 2493 8826
+91 (22) 2497 8119

www.kwikdrawtubes.com